

RATE ANALYSIS

Date: 20/06/2018

Providing and erecting at work site FRP Dome of width 4610mm, length 16000mm with central height dia. 2000mm made out of 2mm thick transparent fiberglass sheet with colour grooves, designed to hide the structural supports inside the grove. The dome is reinforced using angle ISA 50mmx50mmx6mm stiffener of 5 nos. and transverse stiffeners of 9 nos. proper drainage of water at ends on the width side using the existing civil gutters, fixing in position with MS base plate of 100mmx10mm with 4nos. of fastener of length of length 2.5" per plate including fabricating, welding and transport, loading, unloading, site installation, with all other taxes and excluding GST at site etc. complete as directed by Engineer incharge.

Item No.	Description	Qty	Rate Without GST	Unit	Amount Without GST	Remark
1	Labour Rate as per SSR 2017-18	0.00	0.00	Day	0.00	SSR 2017-18
	Total Labour				0.00	
2	Material					
	FRP Dome of width 4610mm, length 16000mm with central height dia. 2000mm made out of 2mm thick transparent fiberglass sheet	1.00	320000 7	No.	320000.00 7	Market rate
3	Grand Total			No.	320000.00	
4	Rate per unit			No.	320000.00	
5	Rate is proposed for Rs.			No.	320000.00	

Rate is Proposed Rs.320000 /- per No. (In words Rs. Rupees Three Lakh Twenty thousand Only without GST)

Shilpi Architects And Planner.
Architects

Jr. Engineer
PCMC

DE. Engineer
PCMC

Ex. Engineer
PCMC

Final rate Approved For above Item is Rs. 320000 /- Per No. without GST


J.E

DE



DE

City Engineer
PCMC

FRP DOME

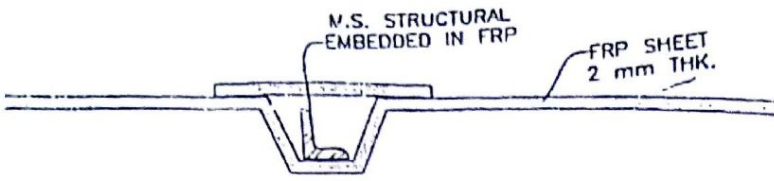


DETAIL 'A' - FRP DOME

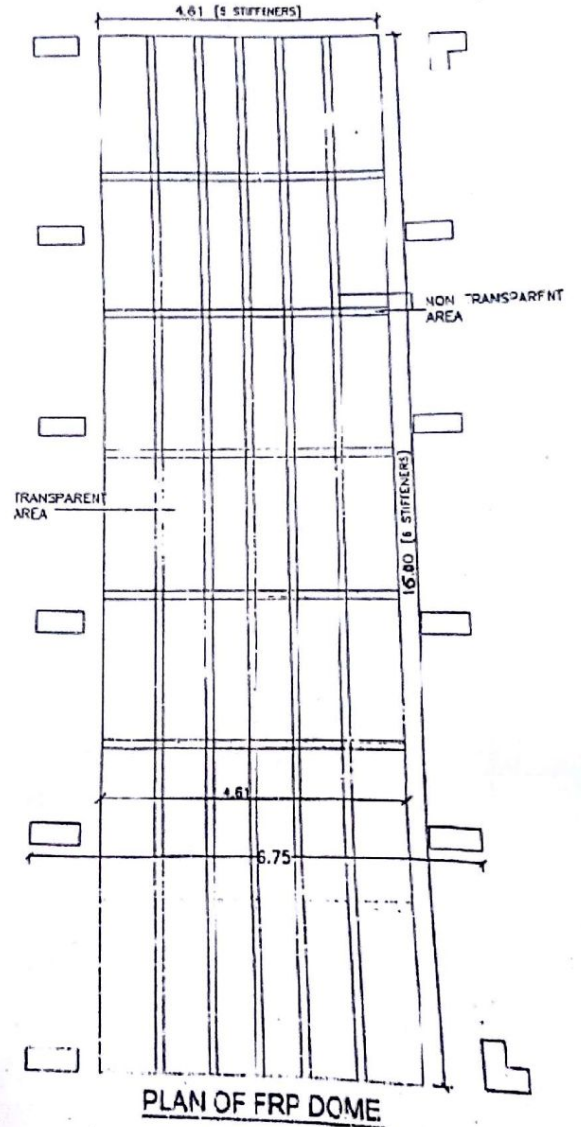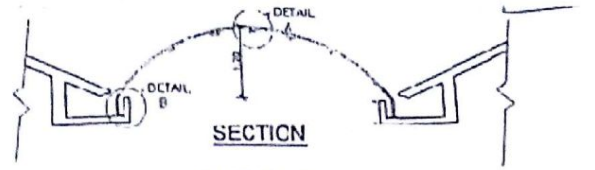

M.S. STRUCTURAL SUPPORT

LONGITUDINAL : ISA 50x50x6 THK. - 5 NOS.
CIRCUMFERENTIAL : ISA 50x50x6 THK. - 6 NOS.

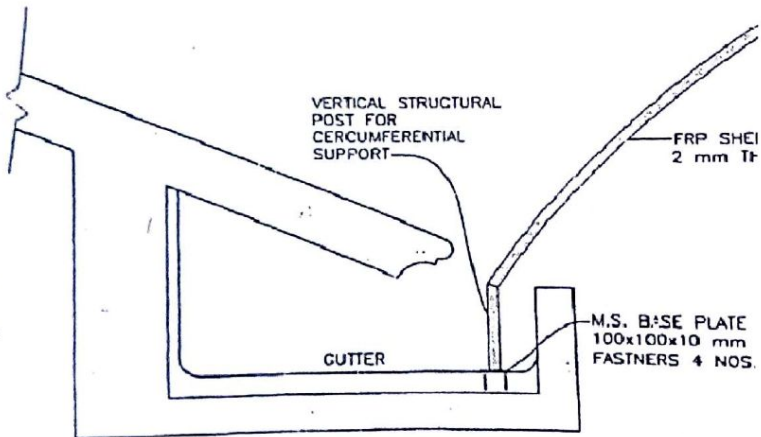

DETAIL 'B' - FRP DOME

[Signature]

Junior Engineer
 Civil Garden
 P C M C

[Signature]

Deputy Engineer
 Civil Garden
 P. C. M. C.

[Signature]

Executive Engineer
 Civil Garden
 Pimpri Chinchwad Municipal Corporation