

Name:- Proposed Development of Various work in ward No. 03 in Moshi, Charoli & ward no.07, Bhosari.

Date:- 23/7/18

Rate Analysis for Anutone False ceiling

Supply and installation of Anutone or Equivalent Manufacturer Stretch Single Large Span (SLS) fabric of following specification with 10 years warranty, FR Grade Solserene fabric system, with high-performance integrated core, with a white matt face covering, acoustically-transparent textile of size 4mx75m. Wooden base of 10mm thick to be installed to the framework, so as to get desired profile as per arch dwg, on the marked lines with metal fasteners should be at 300mm centers embedded in plastic sleeves. Fix SE 38 half wrap, fullwrap and Midseam, rigid FR-PVC high strength extrusions square / bevel edge on the wooden surface by using heavy-duty diverging fasteners at 25mm centers on one/both sides of Stretch Tracks. Anutone or approved make Strand board of size should be 600x1200x20mm thk installed to framework, in between grippers, by using fasteners. Anutone Synth or approved make PF 10x10mm thick is then to be adhered on strand board using Stick 7 or approved make adhesive. The SLS fabric of width 4m is to be stretched and tucked into the tracks and secure into the locking jaws with tucking tools to obtain smooth, wrinkles free finish. Ensure the cord in the fabric are oriented in one direction to achieve uniform shade., including all type of taxes, transportation, loading, unloading as directed by Engineer in charge. • Core Variants - Polyfibre & Pinewoodfibre

• Fire - Class A

• Acoustics - NRC up to 0.9(For 25mm thk E300* mounting for Strand)

• Climate (Degree Celsius, RH) - 49, 90

• Termite resistance - Yes

• Light reflectance - Colour dependant

Green (Voc, RC %) - Low, 25

• Hygiene (VoC, Clean room) - Low, Class 1.

Lowest Rate from Comparative Statement
Unit Considered : 1Sqm.

Sr.No.	Discription	Qty.	Rate (Rs) Without GST	Unit	Amount	Remark
	Material & Labour	1	9328	Sqm.	9328	
	Transportation Charges				NIL	
	Loading & Unloading Charges				NIL	
					NIL	
					NIL	
	Grand Total				9328	
	Rate Per Sq. mt				9328	Per Sqm
	Rate is proposed for Rs.				9328	Per Sqm

Neogen Consultants

Junior Engineer, "E"
Ward P.C.M.C.

Deputy Engineer, "E" Ward
P.C.M.C.

Executive Engineer, "E"
Ward P.C.M.C.

Rate is approved for : Rs. 9328/- (Rupees Nine Thousand Three Hundred and Twenty Eight Only) per Sq.mt.

City Engineer, P.C.M.C.

50

Synth

Stretch SLS



- Stretched ceilings that look like plaster finish
- Single large span, seamless - upto 5x25 - 125m² (1345ft²)
- Up, down or concealed lighting



Type	Span
Finish	Fabrics
Core	Polyfibre, SynthPF
Thickness (mm)	28, 38
Size (m)	W 3 / 4 / 5
Density (Kg/m ²)	na
Weight (g/m ²)	na
Fire (Class)	A
MFC	Upto 1
Warranty (Years)	10
Maintenance	Vacuum, Dry Shampoo

Colors




⚠ Use front side in one direction only

Anders | SoundStretch | Eurospan | Solserene

50

Synth

Stretch SLS

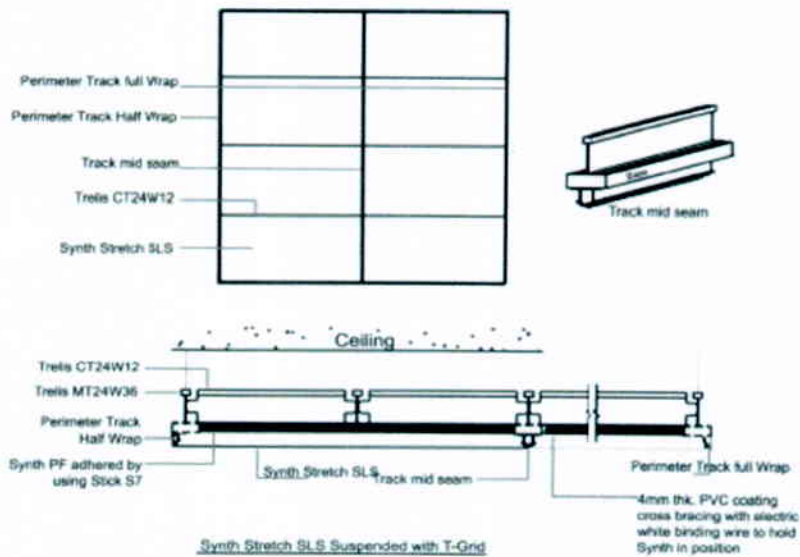

Synth Stretch SLS Suspended with T-Grid



Stretch SLS installed with SE38Tracks on T-Grid

anutone®

Acoustics Drywalls Ceilings Paneling

50

Synth

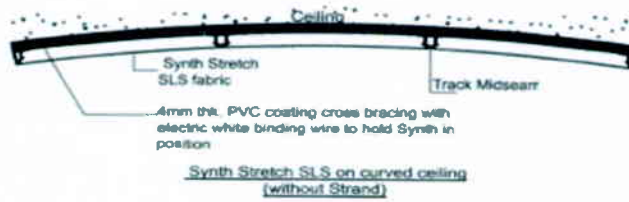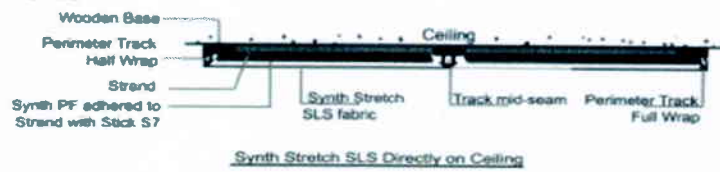Stretch SLS
anutone®
 Acoustics Drywalls Ceilings Paneling


Stretch SLS installed with SE38 Tracks directly to true ceiling

50

Synth

Stretch SLS
anutone®
 Acoustics Drywalls Ceilings Paneling



Gautam Buddha University, Noida

50

Synth

Stretch SLS

anutone
Acoustics Drywalls Ceilings Paneling

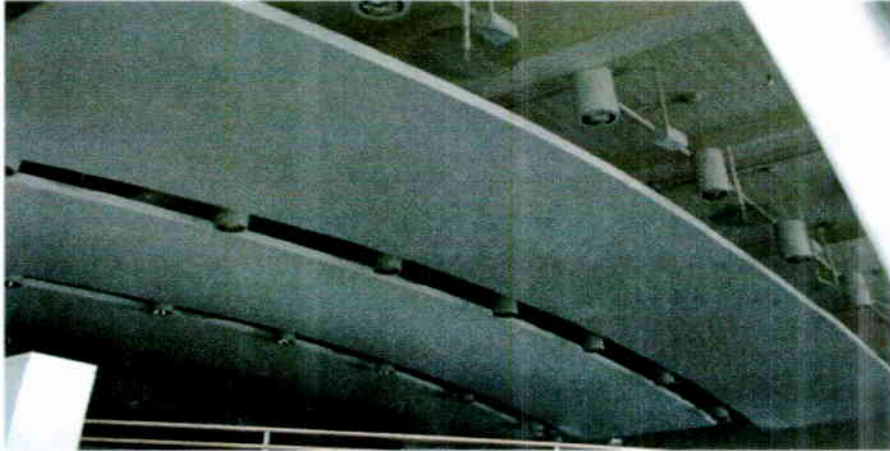


50

Synth

Stretch SLS

anutone
Acoustics Drywalls Ceilings Paneling

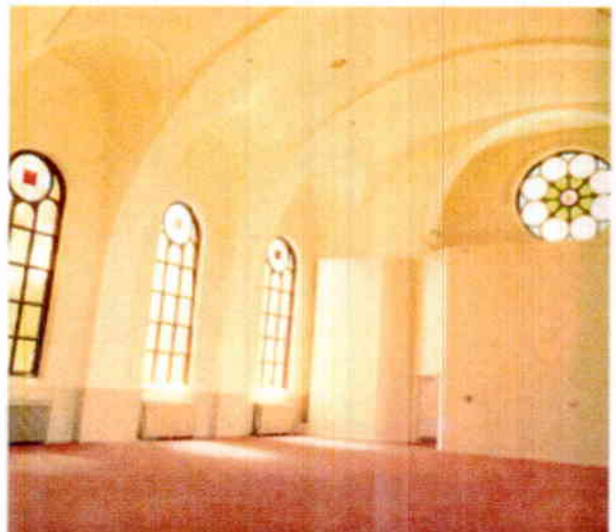

ANUTONE/ Equivalent Manufacturer ACOUSTICAL false ceiling