

Name of work :- Proposed Development of various work at ward No. 3, Moshi , Charoli & ward No. 7, Village Bhosari.

Rate Analysis for EB Titanium 15 - Multisports Truf

Date: 23/7/18

Providing and fixing EB Titanium 15 - Multisports Truf as per following -

- * Material/ Dtex - PE8800
- * Strcuture - Fibrillated
- * Pile Height (mm) - 15 mm
- * Tape Thickness - 950 micron (+-) 10 micron
- * Tape Width - 10 mm (+-) 0.5 mm.
- * Gauge (inch) - 3/16 inch
- * Stitches /m2 - 9450
- * Backing - PP + Mesh scrim inlay
- * Color - Emerald Green
- * SBR Black Rubber Granuels 12 kg/m2, Tape & Glue According to layout plan installation.
- Installation of Truf, infill of silica sand & Granuels, Brushing & Line Marking.
- 3 years of warranty for any product & application Defect & its shall repairs at no cost by the contractor within a warranty period Including all Labour & all type of Taxes, without GST, Transpotation, Loading, unloading, etc.
- Complete as directed by Engineer incharge

Lowest Rate from Comparative Statement

Unit Considered : 1 ~~No.~~ Sq.m.

Sr.No.	Discription	Qty.	Rate (Rs) Without GST	Unit	Amount	Remark
	Material & Labour	1	2280	No.	2280	
	Transportation Charges			Sq.m.	NIL	
	Loading & Unloading Charges				NIL	
					NIL	
					NIL	
	Grand Total				NIL	
	Rate Per Sqm.				2280	
	Rate is proposed for Rs.				2280	Per Sqm.
					2280	Per Sqm.



[Signature]
Junior Engineer,
"E" Ward
P.C.M.C.


[Signature]
Deputy Engineer, "E" Ward
P.C.M.C.

[Signature]
Executive Engineer, "E"
Ward P.C.M.C.

Rate is approved for : Rs.2280/- (Rupees Two Thousand Two Hundred & Eighty only) per Sqm.

[Signature]
City Engineer, P.C.M.C.

[Signature]
City Engineer, P.C.M.C.

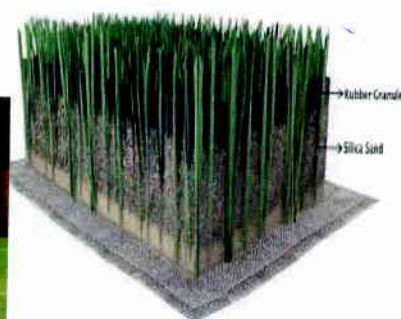

EB - Titanium – 15 Multisports Truf